


# Automotive Cable

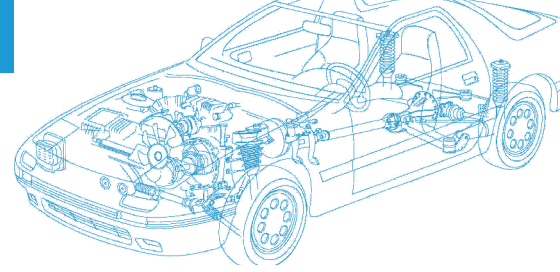


## FLR5Y-A

### Application:

This PTFE insulated low-tension automotive cable is used in motorcycles and other motor vehicles for starting, charging, lighting, signal and instrument panel circuits.

### Construction:

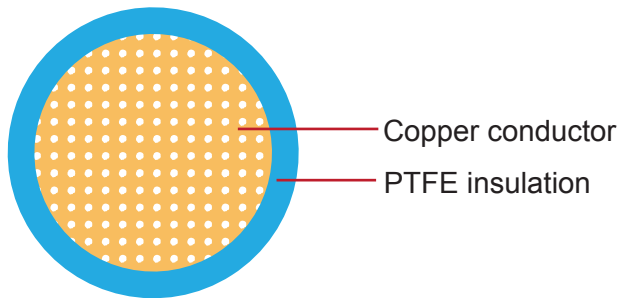

**Conductor:** Silver or Nickel plated copper according to DIN EN 13602

**Insulation:** PTFE

**Standard:** ISO 6722 Class H

### Special properties:

Excellent resistance to chemicals

### Technical Parameters:

**Operating temperature:** -40°C to +260°C

Nominal Cross-section	Conductor Construction			Insulation Nominal Thickness	Cable		
	No. and Dia. of Wires	Diameter of Conductor max.	Electrical Resistance at 20°C max.		Overall Diameter min.	Overall Diameter max.	Weight Approx.
mm <sup>2</sup>	no./mm	mm	mΩ/m	mm	mm	mm	kg/km
1x0.22	7/0.21	0.7	87.9	0.20	1.1	1.2	3
1x0.35	7/0.27	0.8	56.8	0.20	1.25	1.35	5
1x0.5	19/0.19	1.0	38.6	0.22	1.4	1.6	6
1x0.75	19/0.24	1.2	25.7	0.24	1.7	1.9	10
1x1	19/0.27	1.35	19.3	0.24	1.75	1.95	11
1x1.5	19/0.33	1.7	13.2	0.24	2.1	2.3	17
1x2.5	19/0.41	2.2	7.92	0.28	2.5	2.8	25

Note: Other configurations, sizes, colors and length not specified herein are available upon request.