




## Double Galvanized Steel Tape Armored Optical Fiber Cable

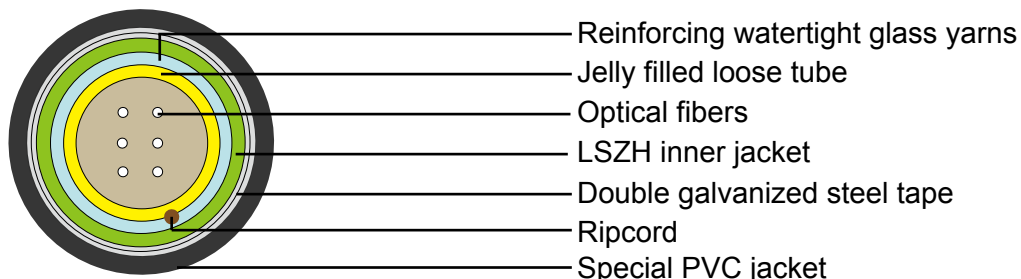

Double Galvanized Steel Tape Armored Optical Fiber Cable

### Applications

These cables are suitable for underground use in industries. The special PVC sheath resists aliphatic and aromatic hydrocarbon and U.V.

### Standards

IEC 794-1-E1; IEC 794-1-E3; IEC 794-1-E4; IEC 794-1-F1; IEC 60332-3-22 Cat.A

### Properties

Operating temperature: -20~60°C

Chemical resistance: Aliphatic and aromatic hydrocarbon resistance

No. of Optical Fiber	Fiber Optic Type	No. of Tube	Diameter over Inner Sheath (mm)	Diameter over Armor (mm)	Min. O.D. (mm)	Max. O.D. (mm)	Approx. Weight (kg/km)
4	50/125	1	6.6	7.7	9.9	11.2	178
4	62.5/125	1	6.6	7.7	9.9	11.2	178
6	50/125	1	6.6	7.7	9.9	11.2	178
6	62.5/125	1	6.6	7.7	9.9	11.2	178
8	50/125	1	6.6	7.7	9.9	11.2	178
8	62.5/125	1	6.6	7.7	9.9	11.2	178
8	9/125	1	6.6	7.7	9.9	11.2	178
12	50/125	1	6.6	7.7	9.9	11.2	178
12	62.5/125	1	6.6	7.7	9.9	11.2	178
12	9/125	1	6.6	7.7	9.9	11.2	178
16	62.5/125	1	6.6	7.7	9.9	11.2	178
24	50/125	1	6.6	7.7	9.9	11.2	178
24	62.5/125	1	6.6	7.7	9.9	11.2	178